


PRODUCT-DETAILS

MS132-2.5

MS132-2.5 Manual Motor Starter 1.6 ... 2.5 A

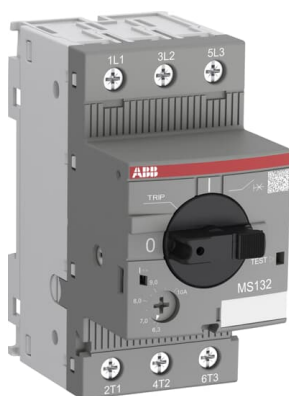

Información General

Tipo de producto extendido	MS132-2.5
Código de producto	1SAM350000R1007
EAN	4013614400070
Descripción corta	MS132-2.5 Manual Motor Starter 1.6 ... 2.5 A

Descripción larga

The MS132-2.5 manual motor starter (also known as motor protection circuit breaker or manual motor protector) is a compact 45 mm width device with a rated operational current of $I_e = 2.50$ A. This device is used to manually switch on and off motors and to protect them reliably and without the need for a fuse from short-circuits, overload and phase failures. The manual motor starter offers a rated service short-circuit breaking capacity $I_{cs} = 100$ kA at 400 VAC and trip class 10. Further features are the build-in disconnect function, temperature compensation, trip-free mechanism and a rotary handle with a clear switch position indication. The manual motor starter is suitable for three- and single-phase applications. The handle is lockable to protect against unauthorized changes. Auxiliary contacts, signaling contacts, undervoltage releases, shunt trips, 3-phase bus bars, power in-feed blocks and terminal spacers are available as accessory.

Clasificación

Cantidad mínima de pedido	1 piece
Código arancelario	85362010

Descargas Populares

Ficha técnica, información técnica	2CDC131021D0202
Instrucciones y manuales	2CDC131022M6802
Instrucciones y manuales (parte 2)	2CDC131060M0202
Instrucciones de uso Ex	2CDC131063M6801
Curva característica tiempo-corriente	1SAM300505F0107
I ² t Característica	1SAM300507F0001 1SAM300507F0003
Característica de la corriente de corte	1SAM300508F0001 1SAM300508F0003
Dibujo dimensional CAD	2CDC001079B0201
Diagrama de dimensiones	1SAM300402F0001

Dimensiones

Ancho del product	45 mm
Alto del producto	90 mm
Largo del product	86.75 mm
Peso del product	0.265 kg

Technical

Capacidad nominal de corte en cortocircuito en servicio (I _{cs})	(230 V AC) 100 kA (250 V DC) 3 Poles in Series 10 kA (400 V AC) 100 kA (440 V AC) 100 kA (500 V AC) 100 kA (690 V AC) 100 kA
Capacidad nominal de corte en cortocircuito (I _{cu})	(230 V AC) 100 kA (400 V AC) 100 kA (440 V AC) 100 kA (500 V AC) 100 kA (690 V AC) 100 kA
Ajuste de la corriente de cortocircuito instantánea nominal (I _i)	31.3 A
Rango de ajuste	1.6 ... 2.5 A
Potencia operativa nominal AC-3 (P _e)	(400 V) Three Phase 0.75 kW
Potencia operativa nominal AC-3e (P _e)	(400 V) Three Phase 0.75 kW
Tensión nominal de operación	Main Circuit 690 V AC Main Circuit 250 V DC
Corriente nominal de funcionamiento (I _e)	2.5 A
Corriente nominal de funcionamiento AC-3 (I _e)	2.5 A
Corriente nominal de funcionamiento AC-3e (I _e)	2.5 A
Corriente nominal de funcionamiento DC-5 (I _e)	2.5 A
Frecuencia nominal (f)	Main Circuit 50 Hz Main Circuit 60 Hz
Frecuencia de funcionamiento (f _{sw})	0 ... 400 Hz
Tensión nominal soportada por impulsos	Main Circuit 6 kV

(U _{imp})	
Tensión nominal de aislamiento (U _i)	690 V
Pérdida de potencia	at Rated Operating Conditions per Pole 0.7 ... 1.8 W
Número de polos	3
Corriente térmica convencional de aire libre (I _{th})	Main Circuit 2.5 A
Grado de protección	Housing IP20 Main Circuit Terminals IP10
Grado de contaminación	3
Durabilidad eléctrica	50000 cycle
Durabilidad mecánica	100000 cycle
Tipo de terminal	Screw Terminals
Capacidad de conexión del circuito principal	Flexible with Ferrule 1/2x 0.75 ... 2.5 mm ² Flexible with Insulated Ferrule 1/2x 0.75 ... 2.5 mm ² Flexible 1/2x 0.75 ... 2.5 mm ² Rigid 1/2x 1 ... 4 mm ²
Par de apriete	Main Circuit 0.8 ... 1.2 N·m
Longitud de pelado del cable	Main Circuit 9 mm
Destornillador recomendado	Pozidriv 2
Posición de montaje	1 ... 6
Montaje en contactores	TH35-15 (35 x 15 mm Mounting Rail) acc. to IEC 60715 TH35-7.5 (35 x 7.5 mm Mounting Rail) acc. to IEC 60715
Distancia mínima de montaje	Electrical Conductive Board, Horizontal - Up to 400 V 0 mm Electrical Conductive Board, Horizontal - Up to 690 V 1.5 mm Electrical Conductive Board, Vertical 75 mm Other Device Same Type, Horizontal 0 mm Other Device Same Type, Vertical 150 mm
Tipo de actuador	Rotary Handle
Indicación de la posición del contacto	ON / OFF / TRIP
Normas	IEC/EN 60947-1 IEC/EN 60947-2 IEC/EN 60947-4-1 UL 60947-1 UL 60947-4-1
Observaciones	UL508 Self-Protected Combination Motor Controller (Type E) in combination with feeder block S1-M3-xx

Technical UL/CSA

Capacidad de corriente de cortocircuito (SCCR)	Manual Self-Protected Combination Controllers (Type E), (480Y / 277 V AC)	65 kA
	Manual Self-Protected Combination Controllers (Type E), (600Y / 347 V AC)	47 kA
	Any UL Listed Fuses or Circuit-Breakers, Group Installations (480 V AC)	65 kA
	Any UL Listed Fuses or Circuit-Breakers, Group Installations (600 V AC)	47 kA
	Any UL Listed Fuses or Circuit-Breakers, Motor Disconnect (480 V AC)	65 kA
	Any UL Listed Fuses or Circuit-Breakers, Motor Disconnect (600 V AC)	47 kA
	Any UL Listed Fuses or Circuit-Breakers, Tap Conductor Protection in Group Installations (480Y / 277 V AC)	65 kA
	Any UL Listed Fuses or Circuit-Breakers, Tap Conductor Protection in Group Installations (600Y / 347 V AC)	47 kA
	Tensión máxima de funcionamiento UL/CSA	Main Circuit 600 V AC
	Potencia nominal UL/CSA	(200 V AC) Three Phase 0.5 Hp (208 V AC) Three Phase 0.5 Hp (220 ... 240 V AC) Three Phase 0.5 Hp

	(440 ... 480 V AC) Three Phase 1 Hp (550 ... 600 V AC) Three Phase 1.5 Hp
Amperios a plena carga Uso del motor	(200 V AC) Three Phase 2.5 A (208 V AC) Three Phase 2.5 A (220 ... 240 V AC) Three Phase 2.5 A (440 ... 480 V AC) Three Phase 2.5 A (550 ... 600 V AC) Three Phase 2.5 A
Rotor bloqueado Amperios	(200 V AC) Three Phase 15 A (208 V AC) Three Phase 15 A (220 ... 240 V AC) Three Phase 15 A (440 ... 480 V AC) Three Phase 15 A (550 ... 600 V AC) Three Phase 15 A
Clasificación de uso general UL/CSA	(600 V AC) 2.5 A
Capacidad de conexión del circuito principal UL/CSA	Flexible 1/2x 16-12 AWG Stranded 1/2x 16-12 AWG
Par de apriete UL/CSA	Main Circuit 10 ... 12 in-lb

Ambiente

Temperatura ambiente	Around the Enclosure 0 ... +40 °C Funcionamiento -25 ... +70 °C Operation Compensated -25 ... +60 °C Almacenamiento -50 ... +80 °C
Compensación de la temperatura del aire ambiente	Yes
Altitud máxima de funcionamiento permisible	2000 m
Resistencia a los golpes según IEC 60068-2-27	11 ms Pulse 25g
Resistencia a las vibraciones según IEC 60068-2-6	5g / 3 ... 150 Hz
Estado de RoHS	Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019

Certificados y Declaraciones (Número de Documento)

Certificado ABS	1SAA963001-0101
Certificado ATEX	1SAA963000-3902
Certificado BV	1SAA963001-0202
Certificado CB	1SAA963002-2002
Certificado CQC	CQC2010010307387700 CQC2019010307243864
Característica de la corriente de corte	1SAM300508F0001 1SAM300508F0003
Declaración de conformidad - CCC	2020980307003526 2020980307003041
Declaración de conformidad - CE	1SAD101100-3402
Declaración de conformidad - UKCA	1SAD201100-3402
Certificado DNV GL	1SAA963001-0304
Certificado EAC	1SAA963000-2701
Ít Característica	1SAM300507F0001 1SAM300507F0003
Certificado IECEX	1SAA963000-4001
Certificado KC	1SAA963002-1502
Certificado LR	1SAA963001-0502
Certificado RINA	1SAA963002-0802

Certificado RMRS	1SAA918000-0704
Certificado UL	E137861-20090225 E345003-20090225

Información de Embalaje

Embalaje Nivel 1 Unidades	box 1 piece
Embalaje Nivel 1 Ancho	92 mm
Embalaje Nivel 1 Largo	95 mm
Embalaje Nivel 1 Alto	50 mm
Embalaje Nivel 1 Peso	0.28 kg
Embalaje Nivel 1 EAN	4013614400070
Embalaje Nivel 2 Unidades	carton 40 piece
Embalaje Nivel 2 Ancho	280 mm
Embalaje Nivel 2 Largo	395 mm
Embalaje Nivel 2 Alto	210 mm
Embalaje Nivel 2 Peso	11.586 kg
Nivel de paquete 2 EAN	4013614408977

Clasificaciones

Código de clasificación de objetos	F
ETIM 4	EC000074 - Motor protective circuit-breaker
ETIM 5	EC000074 - Motor protective circuit-breaker
ETIM 6	EC000074 - Motor protection circuit-breaker
ETIM 7	EC000074 - Motor protection circuit-breaker
ETIM 8	EC000074 - Motor protection circuit-breaker
Clase electrónica	V11.0 : 27370401
UNSPSC	39121521
Código de categoría granular de IDEA (IGCC)	4731 >> Manual Starters
Número E (Finlandia)	3705991
Número E (Suecia)	3112123

Accessories

Identifier	Description	Type	Quantity	Unit Of Measure
1SAM201901R1001	HKF1-11 Auxiliary Contact	HKF1-11	1	piece
1SAM201901R1201	HKF1-11K Auxiliary Contact	HKF1-11K	1	piece
1SAM201901R1002	HKF1-20 Auxiliary Contact	HKF1-20	1	piece
1SAM201901R1202	HKF1-20K Auxiliary Contact	HKF1-20K	1	piece
1SAM201901R1004	HKF1-01 Auxiliary Contact	HKF1-01	1	piece
1SAM201901R1003	HKF1-10 Auxiliary Contact	HKF1-10	1	piece
1SAM201902R1002	HK1-20 Auxiliary Contact	HK1-20	1	piece
1SAM201902R1202	HK1-20K Auxiliary Contact	HK1-20K	1	piece
1SAM201902R1001	HK1-11 Auxiliary Contact	HK1-11	1	piece
1SAM201902R1201	HK1-11K Auxiliary Contact	HK1-11K	1	piece
1SAM201902R1003	HK1-02 Auxiliary Contact	HK1-02	1	piece
1SAM201902R1203	HK1-02K Auxiliary Contact	HK1-02K	1	piece
1SAM201902R1004	HK1-20L Auxiliary Contact	HK1-20L	1	piece
1SAM201902R1204	HK1-20LK Auxiliary Contact	HK1-20LK	1	piece
1SAM201903R1002	SK1-20 Signaling Contact	SK1-20	1	piece

1SAM201903R1202	SK1-20K Signaling Contact	SK1-20K	1	piece
1SAM201903R1005	SK1-20AR Signaling Contact	SK1-20AR	1	piece
1SAM201903R1205	SK1-20ARK Signaling Contact	SK1-20ARK	1	piece
1SAM201903R1001	SK1-11 Signaling Contact	SK1-11	1	piece
1SAM201903R1201	SK1-11K Signaling Contact	SK1-11K	1	piece
1SAM201903R1004	SK1-11AR Signaling Contact	SK1-11AR	1	piece
1SAM201903R1204	SK1-11ARK Signaling Contact	SK1-11ARK	1	piece
1SAM201903R1003	SK1-02 Signaling Contact	SK1-02	1	piece
1SAM201903R1203	SK1-02K Signaling Contact	SK1-02K	1	piece
1SAM201903R1006	SK1-02AR Signaling Contact	SK1-02AR	1	piece
1SAM201903R1206	SK1-02ARK Signaling Contact	SK1-02ARK	1	piece
1SAM301901R1002	CK1-20 Short Circuit Signaling Contact	CK1-20	1	piece
1SAM301901R1001	CK1-11 Short Circuit Signaling Contact	CK1-11	1	piece
1SAM301901R1003	CK1-02 Short Circuit Signaling Contact	CK1-02	1	piece
1SAM201910R1001	AA1-24 Shunt Trip	AA1-24	1	piece
1SAM201910R1002	AA1-110 Shunt Trip	AA1-110	1	piece
1SAM201910R1003	AA1-230 Shunt Trip	AA1-230	1	piece
1SAM201910R1004	AA1-400 Shunt Trip	AA1-400	1	piece
1SAM201904R1010	UA1-20 Undervoltage Release	UA1-20	1	piece
1SAM201904R1001	UA1-24 Undervoltage Release	UA1-24	1	piece
1SAM201904R1002	UA1-48 Undervoltage Release	UA1-48	1	piece
1SAM201904R1003	UA1-60 Undervoltage Release	UA1-60	1	piece
1SAM201904R1004	UA1-110 Undervoltage Release	UA1-110	1	piece
1SAM201904R1008	UA1-208 Undervoltage Release	UA1-208	1	piece
1SAM201904R1005	UA1-230 Undervoltage Release	UA1-230	1	piece
1SAM201904R1006	UA1-400 Undervoltage Release	UA1-400	1	piece
1SAM201904R1007	UA1-415 Undervoltage Release	UA1-415	1	piece
1SAM201904R1009	UA1-575 Undervoltage Release	UA1-575	1	piece
1SAM201906R1102	PS1-2-0-65 Busbar	PS1-2-0-65	1	piece
1SAM201906R1112	PS1-2-1-65 Busbar	PS1-2-1-65	1	piece
1SAM201906R1122	PS1-2-2-65 Busbar	PS1-2-2-65	1	piece
1SAM201916R1103	PS1-3-0-100 Busbar	PS1-3-0-100	1	piece
1SAM201906R1103	PS1-3-0-65 Busbar	PS1-3-0-65	1	piece
1SAM201916R1113	PS1-3-1-100 Busbar	PS1-3-1-100	1	piece
1SAM201906R1113	PS1-3-1-65 Busbar	PS1-3-1-65	1	piece
1SAM201916R1123	PS1-3-2-100 Busbar	PS1-3-2-100	1	piece
1SAM201906R1123	PS1-3-2-65 Busbar	PS1-3-2-65	1	piece
1SAM201916R1104	PS1-4-0-100 Busbar	PS1-4-0-100	1	piece
1SAM201906R1104	PS1-4-0-65 Busbar	PS1-4-0-65	1	piece
1SAM201916R1114	PS1-4-1-100 Busbar	PS1-4-1-100	1	piece
1SAM201906R1114	PS1-4-1-65 Busbar	PS1-4-1-65	1	piece
1SAM201906R1124	PS1-4-2-65 Busbar	PS1-4-2-65	1	piece
1SAM201916R1105	PS1-5-0-100 Busbar	PS1-5-0-100	1	piece
1SAM201906R1105	PS1-5-0-65 Busbar	PS1-5-0-65	1	piece
1SAM201916R1115	PS1-5-1-100 Busbar	PS1-5-1-100	1	piece
1SAM201906R1115	PS1-5-1-65 Busbar	PS1-5-1-65	1	piece
1SAM201906R1125	PS1-5-2-65 Busbar	PS1-5-2-65	1	piece
1SAM201907R1101	S1-M1-25 Power Infeed Block	S1-M1-25	1	piece
1SAM201907R1102	S1-M2-25 Power Infeed Block	S1-M2-25	1	piece
1SAM201907R1103	S1-M3-25 Power Infeed Block	S1-M3-25	1	piece
1SAM201913R1103	S1-M3-35 Power Infeed Block	S1-M3-35	1	piece
1SAM201914R1002	S1-PB1-25 Power Infeed Block	S1-PB1-25	1	piece
1SAM301911R1001	TS1-M3-S1 Terminal Spacer	TS1-M3-S1	1	piece
1SAM301912R1001	TS1-M3-S2 Terminal Spacer	S1-M3-S2	1	piece
1SAM201908R1001	BS1-3 Protection Cover	BS1-3	1	piece

1SAM201909R1001	FS116 Screw Fixing Kit	FS116	1	piece
1SAM201914R1001	PB1-1-32 Connecting Link	PB1-1-32	1	piece
GJF1101903R0002	SA2 Dispositivo enclavamiento	SA2	1	piece
1SAM201911R1012	IB132-F Enclosure	IB132-F	1	piece
1SAM201911R1010	IB132-G Enclosure	IB132-G	1	piece
1SAM201911R1011	IB132-Y Enclosure	IB132-Y	1	piece
1SAM201912R1010	DMS132-G Door Mounting Kit	DMS132-G	1	piece
1SAM201912R1011	DMS132-Y Door Mounting Kit	DMS132-Y	1	piece
1SAM201909R1021	MSAH1 Shaft Supporter	MSAH1	1	piece
1SAM201920R1011	MSHD-LTB Handles	MSHD-LTB	1	piece
1SAM201920R1012	MSHD-LTY Handles	MSHD-LTY	1	piece
1SAM101923R0002	MSMN Driver	MSMN	1	piece
1SAM101923R0012	MSMNO Driver	MSMNO	1	piece
1SCA101647R1001	OXS6X85 SHAFT	OXS6X85	1	piece
1SCA108043R1001	OXS6X105 SHAFT	OXS6X105	1	piece
1SCA101655R1001	OXS6X130 SHAFT	OXS6X130	1	piece
1SCA101659R1001	OXS6X180 SHAFT	OXS6X180	1	piece

Categorías

Productos y sistemas de baja tensión → Aparatos de control → Guardamotores → Guardamotores

Productos y sistemas de baja tensión → Interruptores automáticos → Guardamotores

