


PRODUCT-DETAILS

MS116-1.6

MS116-1.6 Manual Motor Starter

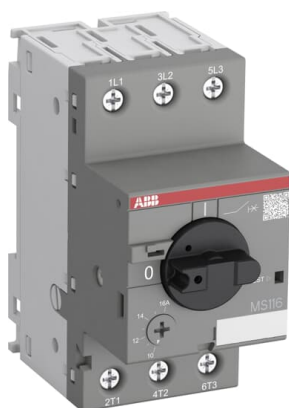

Información General

Tipo de producto extendido	MS116-1.6
Código de producto	1SAM250000R1006
EAN	4013614320293
Descripción corta	MS116-1.6 Manual Motor Starter

Descripción larga	<p>The MS116-1.6 manual motor starter (also known as motor protection circuit breaker or manual motor protector) is a compact 45 mm width device with a rated operational current of $I_e = 1.6$ A. This device is used to manually switch on and off motors and to protect them reliably and without the need for a fuse from short-circuits, overload and phase failures. The manual motor starter offers a rated service short-circuit breaking capacity $I_{cs} = 50$ kA at 400 VAC and trip class 10A. Further features are the build-in disconnect function, temperature compensation, trip-free mechanism and a rotary handle with a clear switch position indication. The manual motor starter is suitable for three- and single-phase applications. Auxiliary contacts, signaling contacts, undervoltage releases, shunt trips, 3-phase bus bars, power in-feed blocks and locking devices for protection against unauthorized changes are available as accessory.</p>
-------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Clasificación

Cantidad mínima de pedido	1 piece
Código arancelario	85362010

Descargas Populares

Ficha técnica, información técnica	2CDC131025D0201
------------------------------------	-----------------

Instrucciones y manuales	2CDC131011M6802
Instructions and Manuals (Part 2)	2CDC131060M0202
Time-Current Characteristic Curve	1SAM200505F0106
I ² t Characteristic	1SAM200507F0001 1SAM200507F0002 1SAM200507F0003
Cut-off Current Characteristic	1SAM200508F0001 1SAM200508F0002 1SAM200508F0003
Dimension Diagram	1SAM200422F0001

Dimensiones

Ancho del product	45 mm
Alto del producto	90 mm
Largo del product	85.6 mm
Peso del product	0.265 kg

Technical

Rated Service Short-Circuit Breaking Capacity (I _{cs})	(230 V AC) 50 kA (400 V AC) 50 kA (440 V AC) 50 kA (500 V AC) 30 kA (690 V AC) 30 kA
Rated Ultimate Short-Circuit Breaking Capacity (I _{cu})	(230 V AC) 100 kA (400 V AC) 100 kA (440 V AC) 100 kA (500 V AC) 100 kA (690 V AC) 100 kA
Rated Instantaneous Short-Circuit Current Setting (I _i)	20 A
Setting Range	1.0 ... 1.6 A
Rated Operational Power AC-3 (P _e)	(400 V) Three Phase 0.55 kW
Rated Operational Power AC-3e (P _e)	(400 V) Three Phase 0.55 kW
Rated Operational Voltage	Main Circuit 690 V AC
Rated Operational Current (I _e)	1.6 A
Rated Operational Current AC-3 (I _e)	1.6 A
Rated Operational Current AC-3e (I _e)	1.6 A
Rated Frequency (f)	Main Circuit 50 Hz Main Circuit 60 Hz
Rated Impulse Withstand Voltage (U _{imp})	Main Circuit 6 kV
Rated Insulation Voltage (U _i)	690 V
Power Loss	at Rated Operating Conditions per Pole 0.6 W
Number of Poles	3
Conventional Free-air Thermal Current (I _{th})	Main Circuit 1.6 A
Grado de protección	Housing IP20 Main Circuit Terminals IP10
Pollution Degree	3

Electrical Durability	100000 cycle
Mechanical Durability	100000 cycle
Terminal Type	Screw Terminals
Connecting Capacity Main Circuit	Flexible with Ferrule 1/2x 0.75 ... 2.5 mm ² Flexible with Insulated Ferrule 1/2x 0.75 ... 2.5 mm ² Flexible 1/2x 0.75 ... 2.5 mm ² Rigid 1/2x 1 ... 4 mm ²
Tightening Torque	Main Circuit 0.8 ... 1.2 N·m
Wire Stripping Length	Main Circuit 9 mm
Recommended Screw Driver	Pozidriv 2
Mounting Position	Position 1 to 6
Mounting on DIN Rail	TH35-15 (35 x 15 mm Mounting Rail) acc. to IEC 60715 TH35-7.5 (35 x 7.5 mm Mounting Rail) acc. to IEC 60715
Minimum Mounting Distance	Electrical Conductive Board, Horizontal - Up to 400 V 0 mm Electrical Conductive Board, Horizontal - Up to 690 V 1.5 mm Electrical Conductive Board, Vertical 75 mm Other Device Same Type, Horizontal 0 mm Other Device Same Type, Vertical 150 mm
Actuator Type	Rotary Handle
Contact Position Indication	ON / OFF
Standards	IEC/EN 60947-1 IEC/EN 60947-2 IEC/EN 60947-4-1 UL 60947-1 UL 60947-4-1

Technical UL/CSA

Short-Circuit Current Rating (SCCR)	Any UL Listed Fuses or Circuit-Breakers, Group Installations (480 V AC) 30 kA Any UL Listed Fuses or Circuit-Breakers, Group Installations (600 V AC) 5 kA Any UL Listed Fuses or Circuit-Breakers, Motor Disconnect (480 V AC) 30 kA Any UL Listed Fuses or Circuit-Breakers, Motor Disconnect (600 V AC) 5 kA
Maximum Operating Voltage UL/CSA	Main Circuit 600 V AC
Ampere Rating UL/CSA	1.6 A
Horsepower Rating UL/CSA	(440 ... 480 V AC) Three Phase 0.75 Hp (550 ... 600 V AC) Three Phase 0.75 Hp
Full Load Amps Motor Use	(200 V AC) Three Phase 1.6 A (208 V AC) Three Phase 1.6 A (220 ... 240 V AC) Three Phase 1.6 A (440 ... 480 V AC) Three Phase 1.6 A (550 ... 600 V AC) Three Phase 1.6 A
Locked Rotor Amps	(200 V AC) Three Phase 9.6 A (208 V AC) Three Phase 9.6 A (220 ... 240 V AC) Three Phase 9.6 A (440 ... 480 V AC) Three Phase 9.6 A (550 ... 600 V AC) Three Phase 9.6 A
General Use Rating UL/CSA	(600 V AC) 1.6 A
Connecting Capacity Main Circuit UL/CSA	Flexible 1/2x 16-12 AWG Stranded 1/2x 16-12 AWG
Tightening Torque UL/CSA	Main Circuit 10 in·lb

Ambiente

Temperatura ambiente	Around the Enclosure 0 ... +40 °C Funcionamiento -25 ... +70 °C Operation Compensated -25 ... +55 °C Almacenamiento -50 ... +80 °C
----------------------	---------------------------------------------------------------------------------------------------------------------------------------------

Ambient Air Temperature Compensation	Yes
Maximum Operating Altitude Permissible	2000 m
Resistance to Shock acc. to IEC 60068-2-27	11 ms Pulse 25g
Resistance to Vibrations acc. to IEC 60068-2-6	5g / 3 ... 150 Hz
RoHS Status	Following EU Directive 2011/65/EU

Certificados y Declaraciones (Número de Documento)

ABS Certificate	1SAA963000-0104
BV Certificate	1SAA963000-0204
CB Certificate	1SAA963005-2003 1SAA963006-2001
CQC Certificate	CQC2011010307506570 CQC2014010307744794
cUL Certificate	cUL_E137861
Cut-off Current Characteristic	1SAM200508F0001 1SAM200508F0002 1SAM200508F0003
Declaration of Conformity - CCC	2020980307003705 2020980307003043
Declaración de conformidad - CE	1SAD938522-0060
Declaration of Conformity - UKCA	1SAD938500-1060
DNV Certificate	1SAA963000-0304
DNV GL Certificate	1SAA963000-0304
EAC Certificate	1SAA963000-2701
Environmental Information	1SAC200050H0009
GL Certificate	1SAA963000-0402
I ² t Characteristic	1SAM200507F0001 1SAM200507F0002 1SAM200507F0003
Instrucciones y manuales	2CDC131011M6802
Instructions and Manuals (Part 2)	2CDC131060M0202
KC Certificate	1SAA963000-1501
LR Certificate	1SAA963000-0505
RMRS Certificate	1SAA918000-0704
RoHS Information	1SAD938517-0060
Time-Current Characteristic Curve	1SAM200505F0106
UL Certificate	UL_E137861

Información de Embalaje

Embalaje Nivel 1 Unidades	box 1 piece
Embalaje Nivel 1 Ancho	92 mm
Embalaje Nivel 1 Largo	95 mm
Embalaje Nivel 1 Alto	50 mm
Embalaje Nivel 1 Peso	0.28 kg
Embalaje Nivel 1 EAN	4013614320293
Package Level 2 Units	carton 40 piece
Package Level 2 Width	280 mm

Package Level 2 Depth / Length	395 mm
Package Level 2 Height	210 mm
Package Level 2 Gross Weight	11.586 kg
Package Level 2 EAN	4013614408663

Clasificaciones

Object Classification Code	F
ETIM 4	EC000074 - Motor protective circuit-breaker
ETIM 5	EC000074 - Motor protective circuit-breaker
ETIM 6	EC000074 - Motor protection circuit-breaker
ETIM 7	EC000074 - Motor protection circuit-breaker
eClass	V11.0 : 27370401
UNSPSC	39121521
IDEA Granular Category Code (IGCC)	4845 >> 3 Pole Motor Circuit Protector Circuit Breakers
E-Number (Finland)	3706006
E-Number (Sweden)	3111940

Accessories


Identifier	Description	Type	Quantity	Unit Of Measure
1SAM201901R1001	HKF1-11 Auxiliary Contact	HKF1-11	1	piece
1SAM201901R1201	HKF1-11K Auxiliary Contact	HKF1-11K	1	piece
1SAM201901R1002	HKF1-20 Auxiliary Contact	HKF1-20	1	piece
1SAM201901R1202	HKF1-20K Auxiliary Contact	HKF1-20K	1	piece
1SAM201901R1004	HKF1-01 Auxiliary Contact	HKF1-01	1	piece
1SAM201901R1003	HKF1-10 Auxiliary Contact	HKF1-10	1	piece
1SAM201902R1002	HK1-20 Auxiliary Contact	HK1-20	1	piece
1SAM201902R1202	HK1-20K Auxiliary Contact	HK1-20K	1	piece
1SAM201902R1001	HK1-11 Auxiliary Contact	HK1-11	1	piece
1SAM201902R1201	HK1-11K Auxiliary Contact	HK1-11K	1	piece
1SAM201902R1003	HK1-02 Auxiliary Contact	HK1-02	1	piece
1SAM201902R1203	HK1-02K Auxiliary Contact	HK1-02K	1	piece
1SAM201902R1004	HK1-20L Auxiliary Contact	HK1-20L	1	piece
1SAM201902R1204	HK1-20LK Auxiliary Contact	HK1-20LK	1	piece
1SAM201903R1002	SK1-20 Signaling Contact	SK1-20	1	piece
1SAM201903R1202	SK1-20K Signaling Contact	SK1-20K	1	piece
1SAM201903R1001	SK1-11 Signaling Contact	SK1-11	1	piece
1SAM201903R1201	SK1-11K Signaling Contact	SK1-11K	1	piece
1SAM201903R1003	SK1-02 Signaling Contact	SK1-02	1	piece
1SAM201903R1203	SK1-02K Signaling Contact	SK1-02K	1	piece
1SAM201910R1001	AA1-24 Shunt Trip	AA1-24	1	piece
1SAM201910R1002	AA1-110 Shunt Trip	AA1-110	1	piece
1SAM201910R1003	AA1-230 Shunt Trip	AA1-230	1	piece
1SAM201910R1004	AA1-400 Shunt Trip	AA1-400	1	piece
1SAM201904R1010	UA1-20 Undervoltage Release	UA1-20	1	piece
1SAM201904R1001	UA1-24 Undervoltage Release	UA1-24	1	piece
1SAM201904R1002	UA1-48 Undervoltage Release	UA1-48	1	piece
1SAM201904R1003	UA1-60 Undervoltage Release	UA1-60	1	piece
1SAM201904R1004	UA1-110 Undervoltage Release	UA1-110	1	piece
1SAM201904R1008	UA1-208 Undervoltage Release	UA1-208	1	piece
1SAM201904R1005	UA1-230 Undervoltage Release	UA1-230	1	piece

1SAM201904R1006	UA1-400 Undervoltage Release	UA1-400	1	piece
1SAM201904R1007	UA1-415 Undervoltage Release	UA1-415	1	piece
1SAM201904R1009	UA1-575 Undervoltage Release	UA1-575	1	piece
1SAM201906R1102	PS1-2-0-65 Busbar	PS1-2-0-65	1	piece
1SAM201906R1112	PS1-2-1-65 Busbar	PS1-2-1-65	1	piece
1SAM201906R1122	PS1-2-2-65 Busbar	PS1-2-2-65	1	piece
1SAM201916R1103	PS1-3-0-100 Busbar	PS1-3-0-100	1	piece
1SAM201906R1103	PS1-3-0-65 Busbar	PS1-3-0-65	1	piece
1SAM201916R1113	PS1-3-1-100 Busbar	PS1-3-1-100	1	piece
1SAM201906R1113	PS1-3-1-65 Busbar	PS1-3-1-65	1	piece
1SAM201916R1123	PS1-3-2-100 Busbar	PS1-3-2-100	1	piece
1SAM201906R1123	PS1-3-2-65 Busbar	PS1-3-2-65	1	piece
1SAM201916R1104	PS1-4-0-100 Busbar	PS1-4-0-100	1	piece
1SAM201906R1104	PS1-4-0-65 Busbar	PS1-4-0-65	1	piece
1SAM201916R1114	PS1-4-1-100 Busbar	PS1-4-1-100	1	piece
1SAM201906R1114	PS1-4-1-65 Busbar	PS1-4-1-65	1	piece
1SAM201906R1124	PS1-4-2-65 Busbar	PS1-4-2-65	1	piece
1SAM201916R1105	PS1-5-0-100 Busbar	PS1-5-0-100	1	piece
1SAM201906R1105	PS1-5-0-65 Busbar	PS1-5-0-65	1	piece
1SAM201916R1115	PS1-5-1-100 Busbar	PS1-5-1-100	1	piece
1SAM201906R1115	PS1-5-1-65 Busbar	PS1-5-1-65	1	piece
1SAM201906R1125	PS1-5-2-65 Busbar	PS1-5-2-65	1	piece
1SAM201907R1101	S1-M1-25 Power Infeed Block	S1-M1-25	1	piece
1SAM201907R1102	S1-M2-25 Power Infeed Block	S1-M2-25	1	piece
1SAM201907R1103	S1-M3-25 Power Infeed Block	S1-M3-25	1	piece
1SAM201913R1103	S1-M3-35 Power Infeed Block	S1-M3-35	1	piece
1SAM201914R1002	S1-PB1-25 Power Infeed Block	S1-PB1-25	1	piece
1SAM201914R1001	PB1-1-32 Connecting Link	PB1-1-32	1	piece
1SAM201908R1001	BS1-3 Protection Cover	BS1-3	1	piece
1SAM201909R1001	FS116 Screw Fixing Kit	FS116	1	piece
GJF1101903R0001	SA1 Dispositivo enclavamiento	SA1	1	piece
GJF1101903R0002	SA2 Dispositivo enclavamiento	SA2	1	piece
GJF1101903R0003	SA3 Terminals and Installation Material	SA3	1	piece
1SAM201911R1012	IB132-F Enclosure	IB132-F	1	piece
1SAM201911R1010	IB132-G Enclosure	IB132-G	1	piece
1SAM201911R1011	IB132-Y Enclosure	IB132-Y	1	piece
1SAM201912R1010	DMS132-G Door Mounting Kit	DMS132-G	1	piece
1SAM201912R1011	DMS132-Y Door Mounting Kit	DMS132-Y	1	piece
1SAM201909R1021	MSAH1 Shaft Supporter	MSAH1	1	piece
1SAM201920R1001	MSHD-LB Handles	MSHD-LB	1	piece
1SAM201920R1002	MSHD-LY Handles	MSHD-LY	1	piece
1SAM201920R1000	MSH-AR Shaft Alignment Ring	MSH-AR	1	piece
1SAM101923R0002	MSMN Driver	MSMN	1	piece
1SAM101923R0012	MSMNO Driver	MSMNO	1	piece
1SCA101647R1001	OXS6X85 SHAFT	OXS6X85	1	piece
1SCA108043R1001	OXS6X105 SHAFT	OXS6X105	1	piece
1SCA101655R1001	OXS6X130 SHAFT	OXS6X130	1	piece
1SCA101659R1001	OXS6X180 SHAFT	OXS6X180	1	piece

Categorías

Productos y sistemas de baja tensión → Aparatos de control → Guardamotores → Guardamotores

Productos y sistemas de baja tensión → Interruptores automáticos → Guardamotores



Bogotá Sala de Ventas

Carrera 12 No 13 - 46
PBX: 6013360755 - 6013412439
Celular: 312 3055335

Centro de Distribución

Carrera 18 No 19A - 36
PBX: 6013360755 EXT: 2101

